

# Analysis of processes and properties at a rough porous-medium free-flow interface

## Motivation

This project focuses on understanding and modeling the relevant processes of evaporation. Evaporation is strongly influenced by the interaction of different physical processes:

- in the **free flow**
- at the **interface**
- inside the **porous medium**

The main goal is to describe these processes and to simulate porous-medium flow with an adjacent free flow. The developed concept can be used for improving soil salinization simulations, analyzing water balance relations or technical applications, like fuel cells or drying and cooling processes.

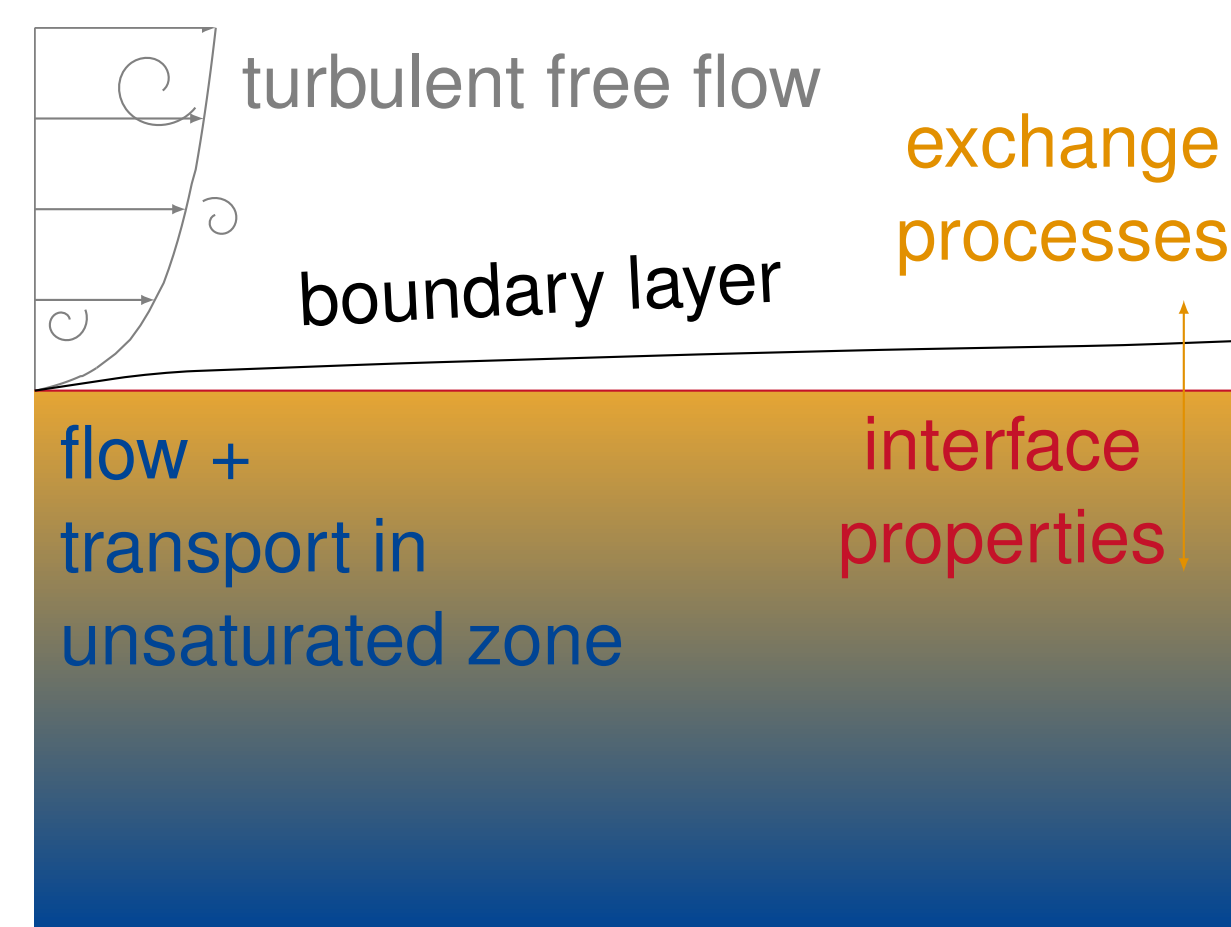


Figure 1: Relevant processes for modeling evaporation from bare soil.

## Preliminary Concept


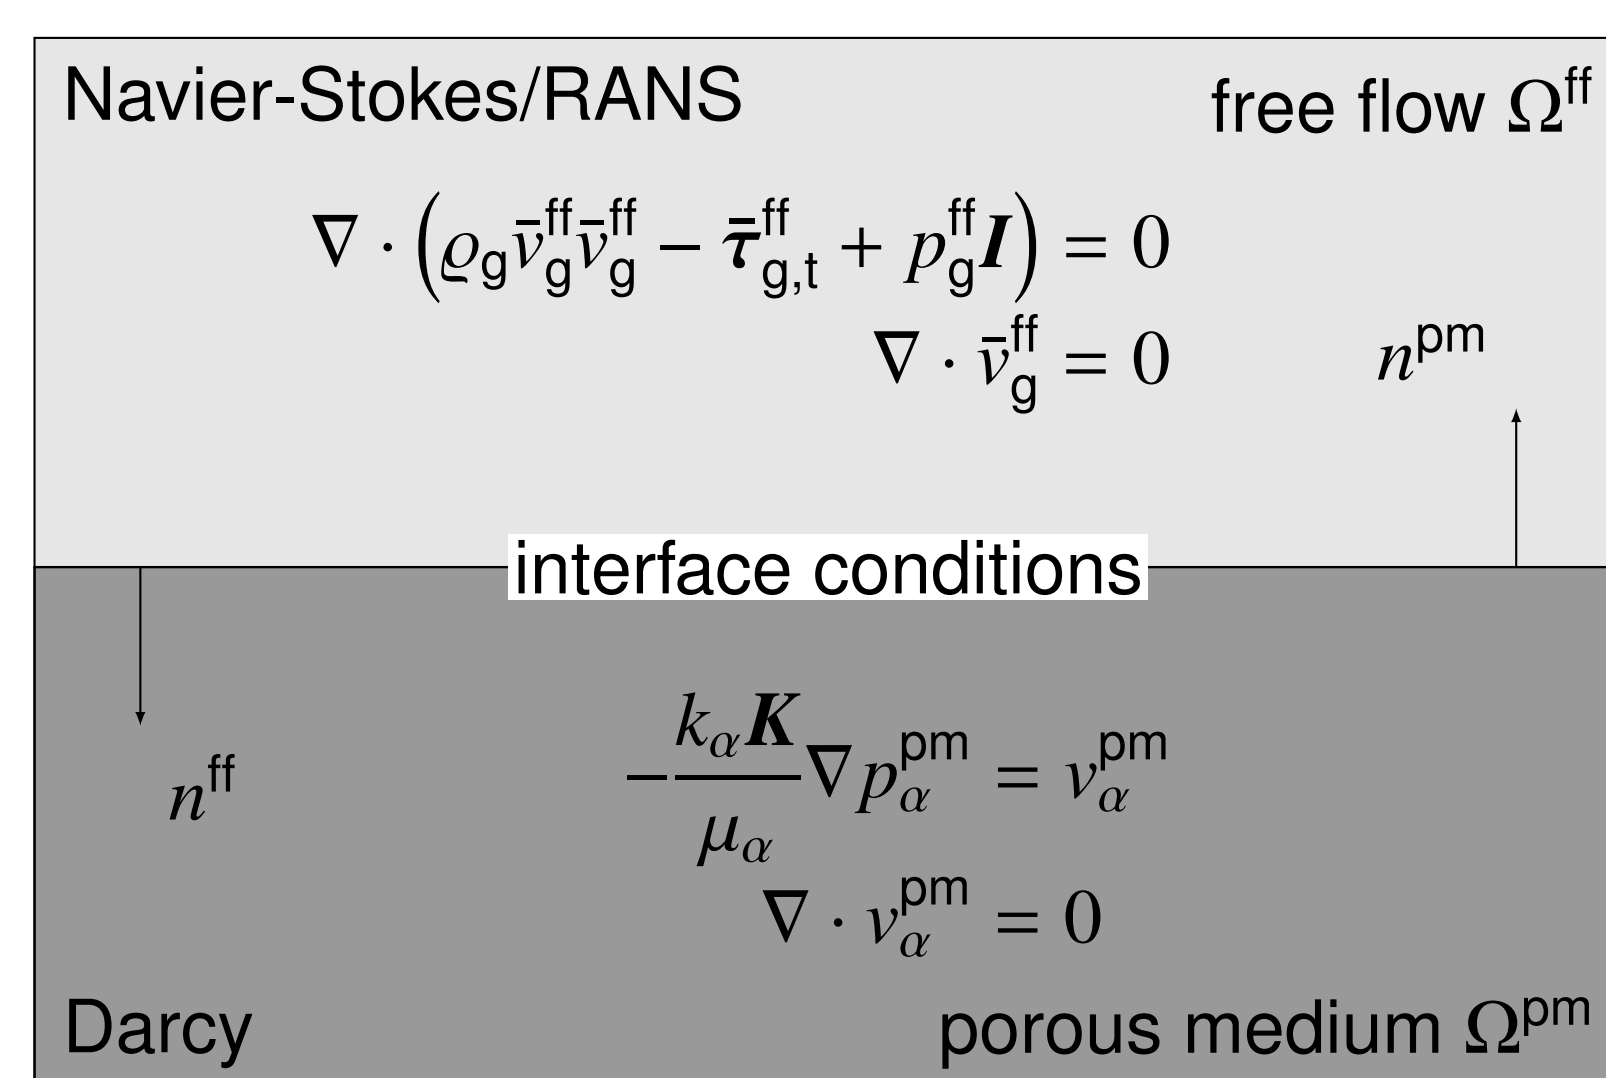


Figure 2: Sketch of the two-domain concept, after [4].

- box-method
- monolithic, fully implicit
- local thermal equilibrium
- flux continuity
- roughness concept [1, 3]


## Future Coupling Concept

### Porous Medium Model

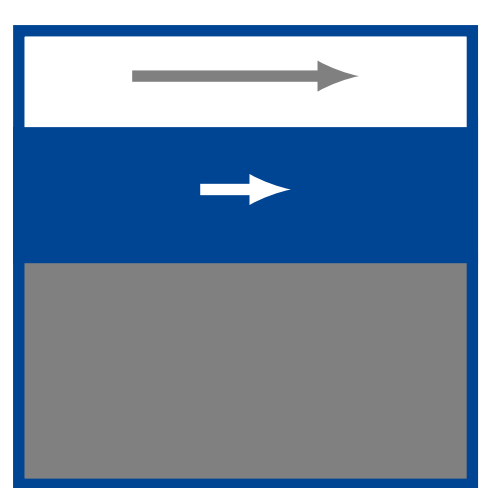


- REV concept
- Darcy's law
- two fluid phases (gas, liquid)
- two components (air, water)
- non-isothermal

### Free Flow Model

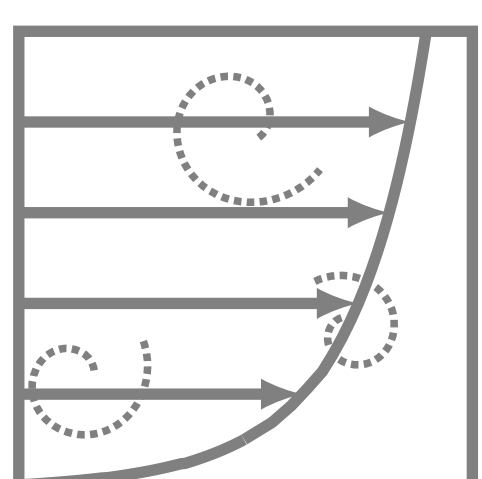


- laminar/ turbulent ( $k$ - $\varepsilon$ ,  $k$ - $\omega$ )
- Reynolds-averaged Navier-Stokes
- single fluid phase (gas)
- two component (air, water)
- non-isothermal

### Coupling Concept

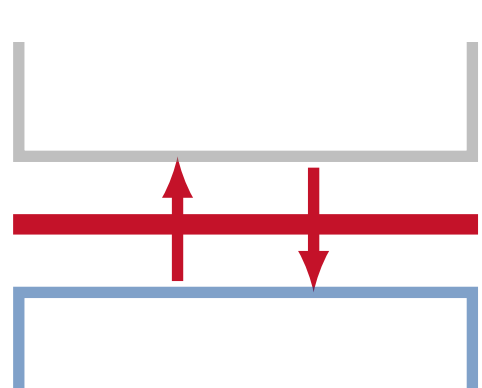

- local thermodynamic equilibrium
- continuity of fluxes
- extension of [4] to turbulent conditions
- wall functions for rough interfaces

### Discretizations

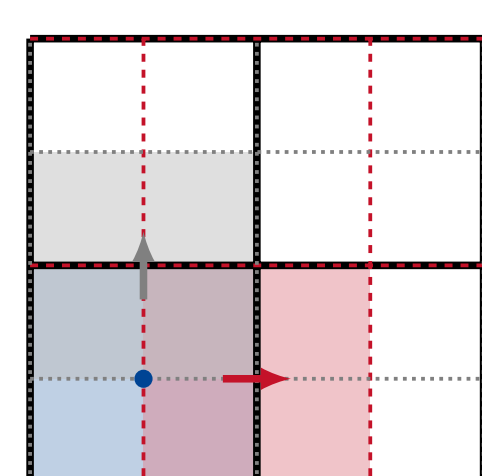

- free flow: staggered grid, FV
- porous medium: cell centered, FV
- time: implicit Euler
- sequential or fully implicit

## Preliminary Results

### Wind Tunnel Evaporation Experiments [2]

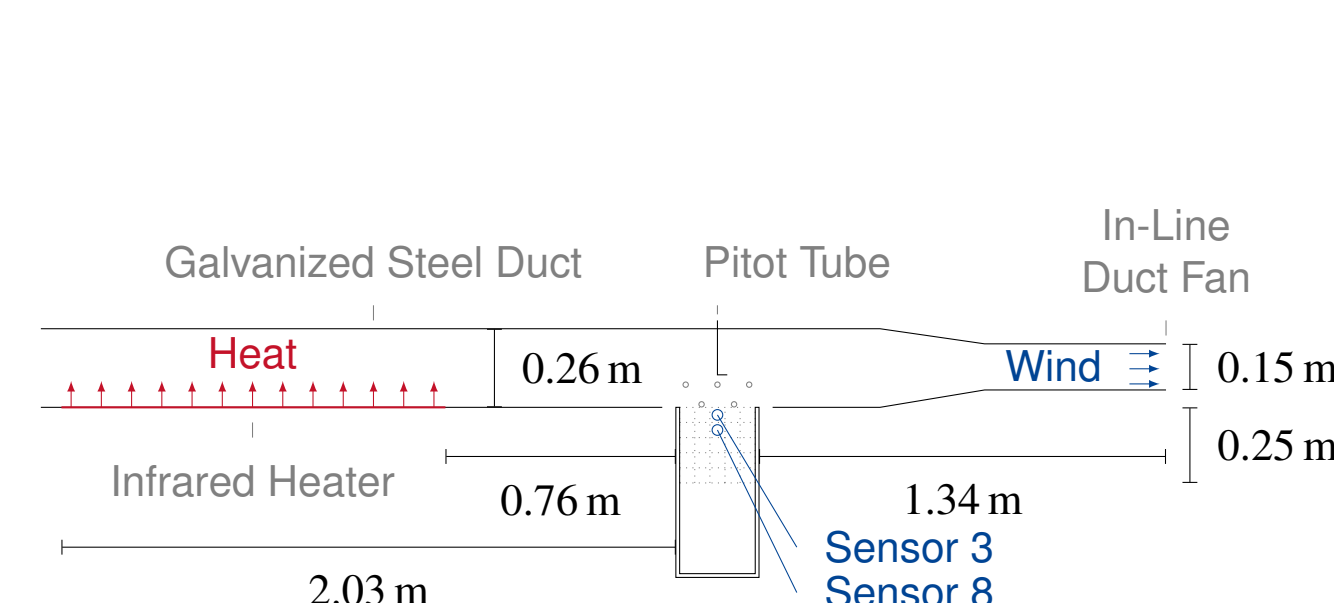


Figure 3: Setup for evaporation experiments performed by [2].

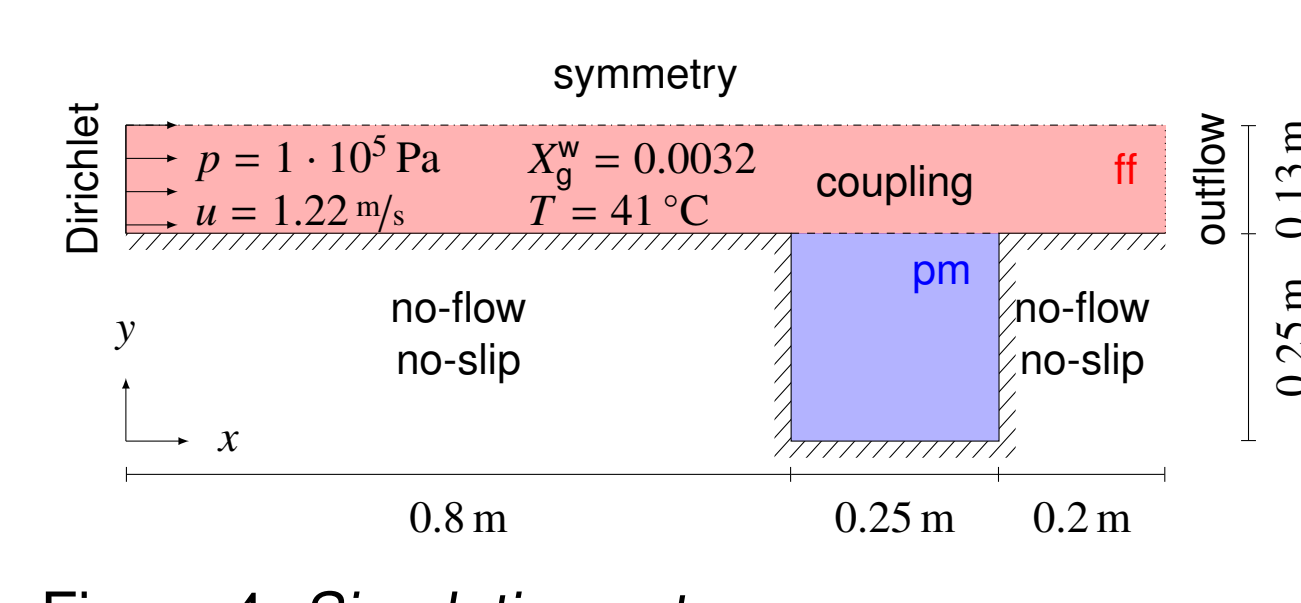


Figure 4: Simulation setup.

### Heterogeneity





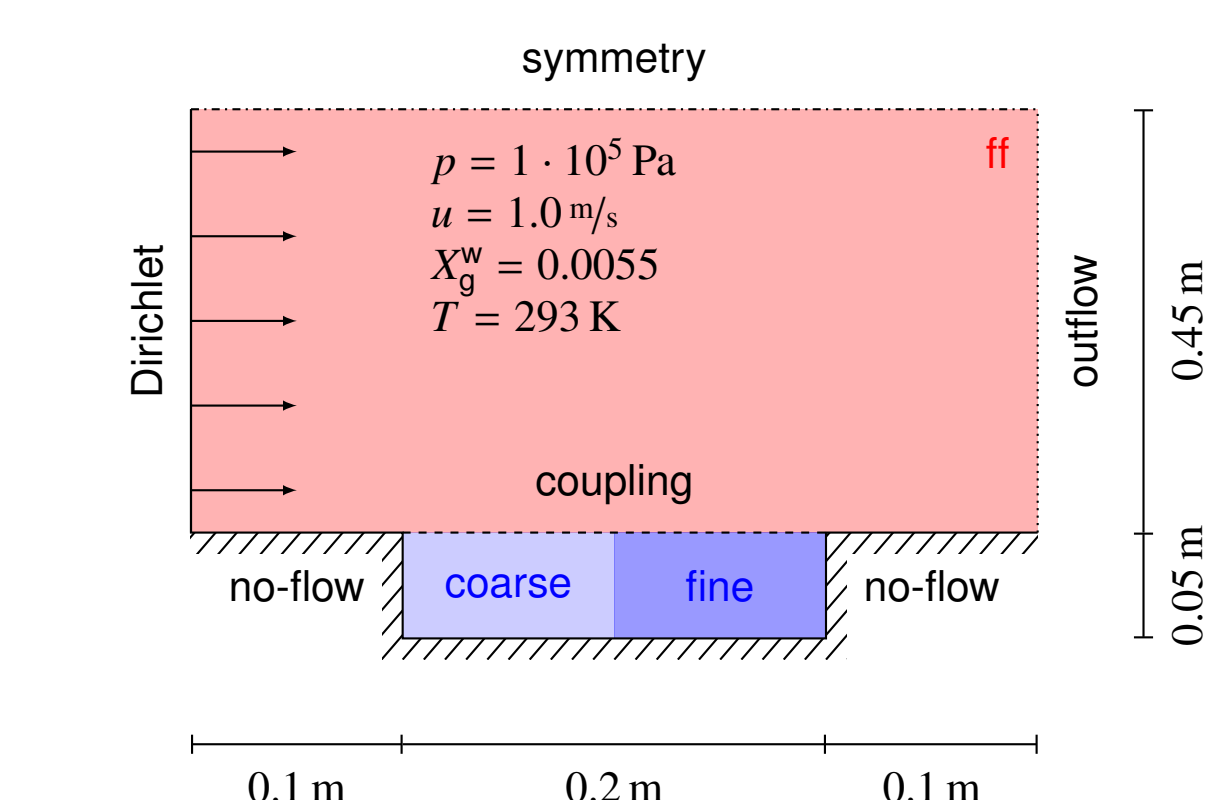


Figure 5: Simulation setup for evaporation from soil with a heterogeneity.

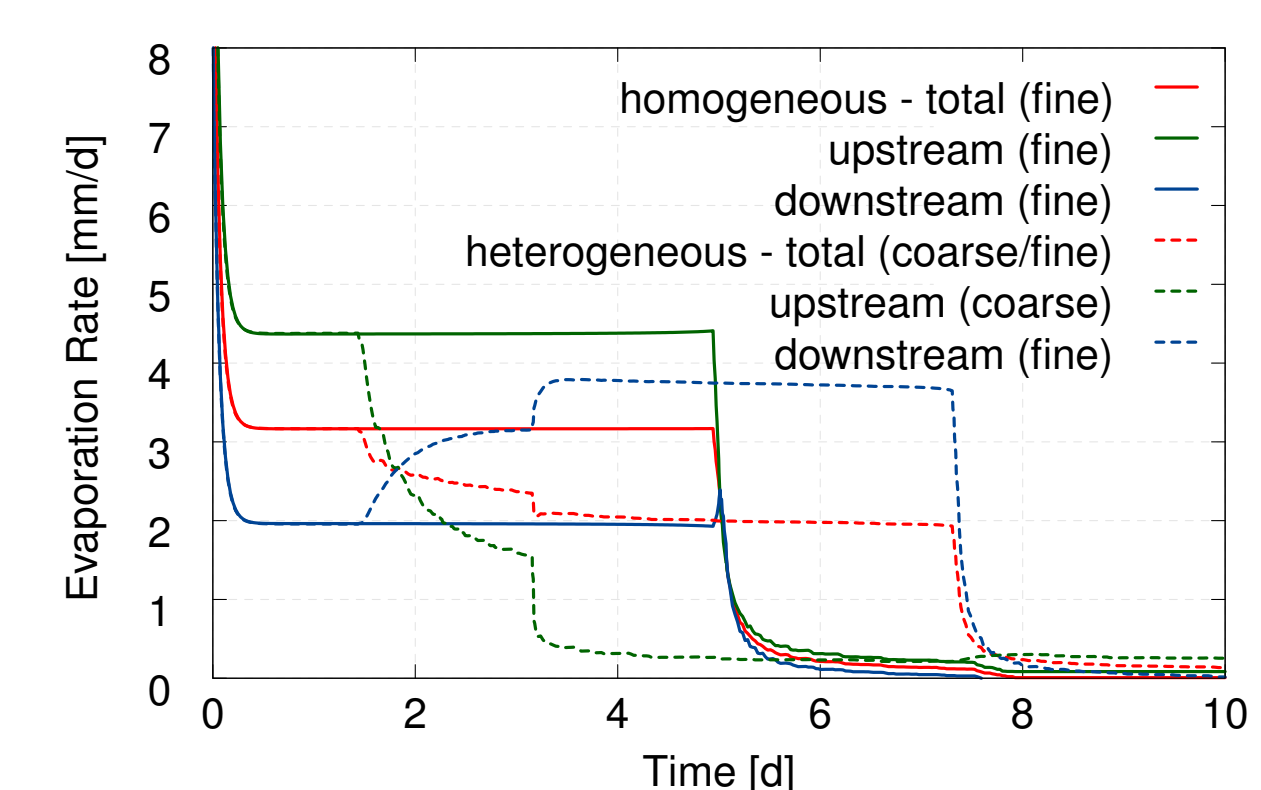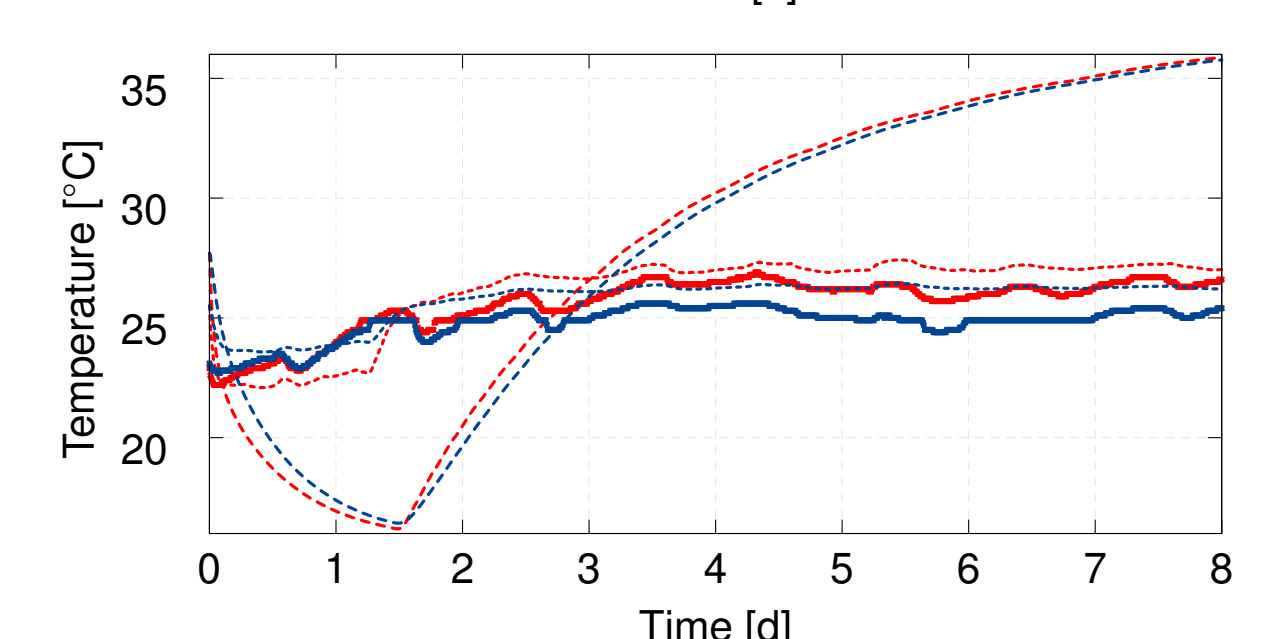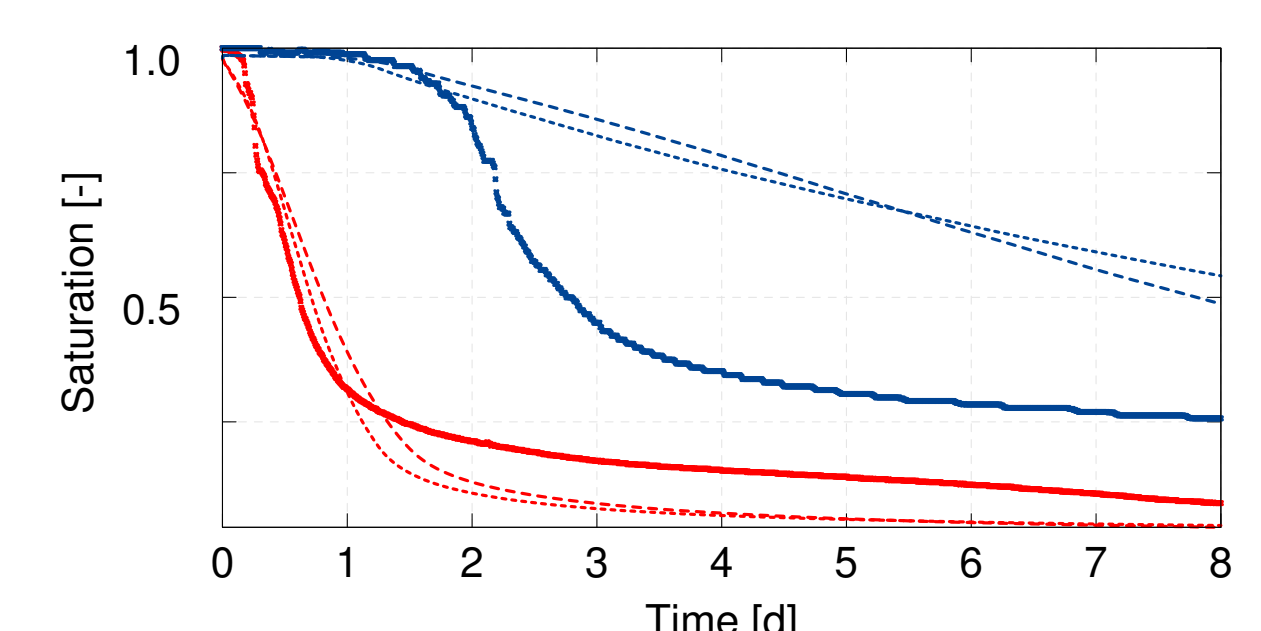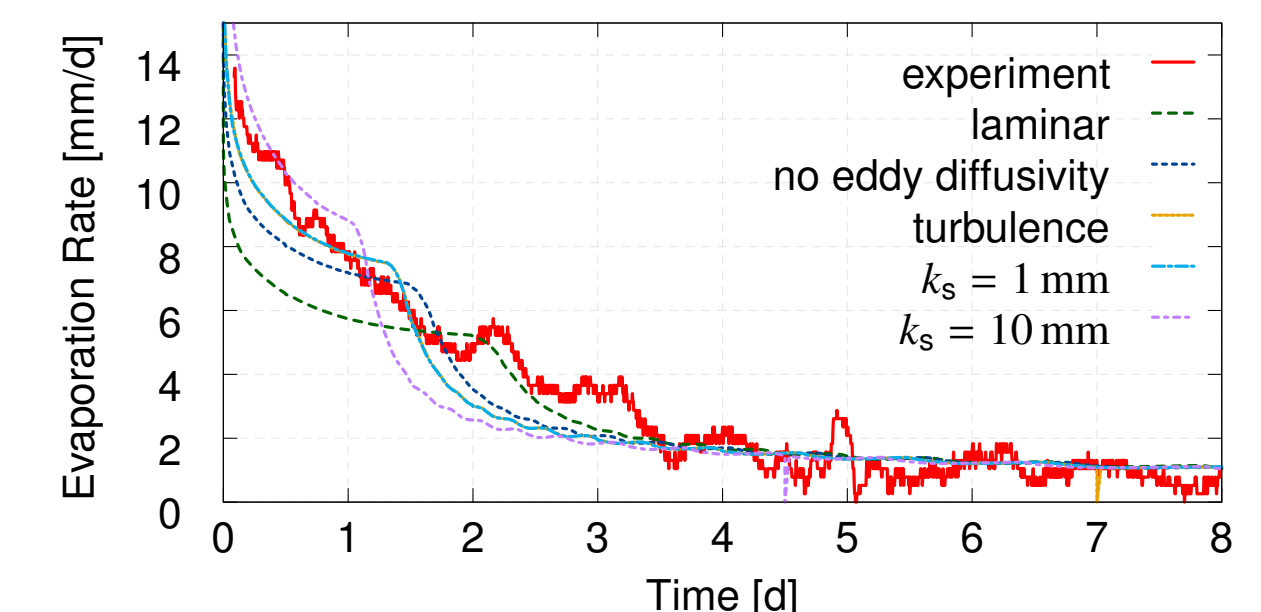

## Outlook

### Short-Term

- further evaluation of results
- implementation of new coupling concept
- including gravitational forces

### Long-Term

- analysis of pore scale effects
- design of new experiments for comparison of numerical results
- reduction of model complexity

## Literature

- [1] Cebeci, T. (1978). Calculation of Incompressible Rough-Wall Boundary Layer Flows. *AIAA Journal*, 16(7):730–735.
- [2] Davarzani, H., Smits, K., Tolene, R. M., and Illangasekare, T. (2014). Study of the effect of wind speed on evaporation from soil through integrated modeling of the atmospheric boundary layer and shallow subsurface. *Water Resources Research*, 50:1–20.
- [3] Kuznetsov, A. and Becker, S. (2004). Effect of the interface roughness on turbulent convective heat transfer in a composite porous/fluid duct. *International Communications in Heat and Mass Transfer*, 31(1):11–20.
- [4] Mosthaf, K., Baber, K., Flemisch, B., Helmig, R., Leijnse, A., Rybak, I., and Wohlmuth, B. (2011). A coupling concept for two-phase compositional porous-medium and single-phase compositional free flow. *Water Resources Research*, 47(10):W10522.



Simulations are performed using the open-source simulator DuMuX.

Support of the German Research Foundation is gratefully acknowledged.

This study is done in cooperation with the research unit MUSIS.



Link to this poster